

**ETU-LINK**

Optical Communication System

**SFP28 Series****SFP28****ES2Bxx2X-3LCD40****25Gb/s SFP28 BIDI 40km Optical Transceiver Module****1270nmTX/1330nmRX / 1330nmTX/1270nmRX**

- Up to 25.78Gb/s data rate
- 1270nm DFB laser and APD receiver for ES2B232X-3LCD40
- 1330nm DFB laser and APD receiver for ES2B322X-3LCD40
- 2-wire interface with integrated Digital Diagnostic monitoring
- Up to 40km transmission on SMF
- BIDI LC optical connector
- Single +3.3V power supply
- RoHS-6 compliant and lead-free
- Compliant with SFF+MSA and SFF-8472
- Maximum power consumption 1.5W
- Metal enclosure, for lower EMI
- Meet ESD requirements, resist 8KV direct contact voltage
- Operating case temperature

Commercial: 0 ~ +70°C

Extended: -10 ~ +80°C

Industrial: -40 ~ +85°C

**Applications**

- High-speed storage area networks
- Computer cluster cross-connect
- Custom high-speed data pipes
- Inter Rack Connection

## Description

ETU-Link's ES2Bxx2X-3LCD40 transceiver is designed for use in 25-Gigabit Ethernet links up to 40km over single mode fiber. The module consists of CWDM DFB Laser, APD and Pre-amplifier in a high-integrated optical sub-assembly. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The transmitter converts 25Gbit/s serial PECL or CML electrical data into serial optical data compliant with the 25GBASE-LR standard. An open collector compatible Transmit Disable (Tx\_Dis) is provided. Logic "1" or no connection on this pin will disable the laser from transmitting. Logic "0" on this pin provides normal operation. The transmitter has an internal automatic power control loop (APC) to ensure constant optical power output across supply voltage and temperature variations. An open collector compatible Transmit Fault (Tx\_Fault) is provided. TX\_Fault is module output contact that when high, indicates that the module transmitter has detected a fault condition related to laser operation or safety. The TX\_Fault output contact is an open drain/collector and shall be pulled up to the Vcc\_Host in the host with a resistor in the range 4.7-10 kΩ. TX\_Disable is a module input contact. When TX\_Disable is asserted high or left open, the SFP28 module transmitter output shall be turned off. This contact shall be pulled up to VccT with a 4.7 kΩ to 10 kΩ resistor

The receiver converts 25Gbit/s serial optical data into serial PECL/CML electrical data. An open collector compatible Loss of Signal is provided. Rx\_LOS when high indicates an optical signal level below that specified in the relevant standard. The Rx\_LOS contact is an open drain/collector output and shall be pulled up to Vcc\_Host in the host with a resistor in the range 4.7-10 kΩ, or with an active termination. Power supply filtering is recommended for both the transmitter and receiver. The Rx\_LOS signal is intended as a preliminary indication to the system in which the SFP28 is installed that the received signal strength is below the specified range. Such an indication typically points to non-installed cables, broken cables, or a disabled, failing or a powered off transmitter at the far end of the cable.

## Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Max	Unit	Notes
Storage Temperature	T <sub>s</sub>	-40	85	°C	
Power Supply Voltage	V <sub>CC</sub>	-0.5	3.6	V	
Relative Humidity (non-condensation)	RH	5	95	%	
Damage Threshold	TH <sub>d</sub>	-3		dBm	

## Recommended Operating Conditions and Power Supply Requirements

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Operating Case Temperature	T <sub>OP</sub>	0		70	°C	commercial
		-10		80		Extended
		-40		85		Industrial
Power Supply Voltage	V <sub>CC</sub>	3.135	3.3	3.465	V	
Data Rate			25.78		Gb/s	
Control Input Voltage High		2		V <sub>CC</sub>	V	
Control Input Voltage Low		0		0.8	V	
Link Distance (SMF)	D			40	km	9/125um

## Pin Assignment and Pin Description

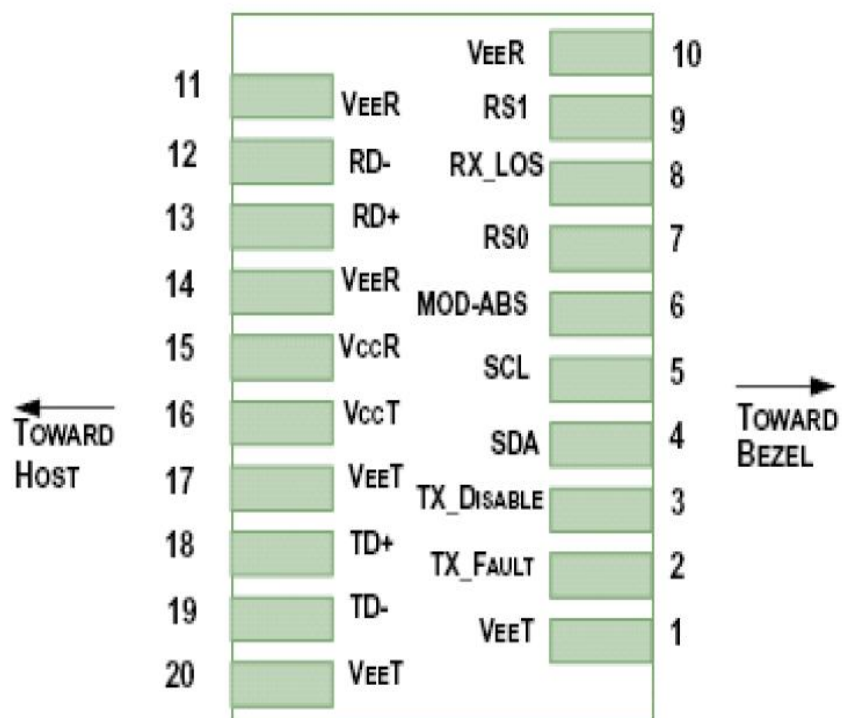


Figure1. Diagram of host board connector block pin numbers and names

PIN	Name	Name/Description	Notes
1	VeeT	Transmitter Ground	1
2	TX_Fault	Transmitter Fault	
3	TX_Disable	Transmitter Disable; Turns off transmitter laser output	
4	SDA	Two wire serial interface Data Line (LVCMOS-I/O) (MOD-DEF2)	2
5	SCL	Two wire serial interface Clock Line (LVCMOS-I/O) (MOD-DEF1)	2
6	MOD_ABS	Module Definition, Grounded in the module	
7	RS0	Rx Rate Select:	
8	RX_LOS	Receiver Loss of Signal Indication Active LOW	
9	RS1	Transmitter Rate Select (not used)	
10	VeeR	Receiver Ground	1
11	VeeR	Receiver Ground	1
12	RD-	Receiver Inverted Data Output	
13	RD+	Receiver Data Output	
14	VeeR	Receiver Ground	1
15	VccR	Receiver Power - +3.3V	
16	VccT	Transmitter Power - +3.3 V	
17	VeeT	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted Data Input	
19	TD-	Transmitter Inverted Data Input	
20	VeeT	Transmitter Ground	1

Notes:

1. Module ground pins GND are isolated from the module case.
2. Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.47V on the host board.

## Electrical Characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Power Consumption	p			1.75	W	
Supply Current	I <sub>cc</sub>			520	mA	
<b>Transmitter</b>						
Single-ended Input Voltage Tolerance	V <sub>cc</sub>	-0.3		4.0	V	
Common mode voltage tolerance		15			mV	
Differential Input Voltage Swing	V <sub>in,pp</sub>	180		700	mV <sub>pp</sub>	
Differential Input Impedance	Z <sub>in</sub>	90	100	110	Ohm	1
Transmit Disable Assert Time				10	us	
Transmit Disable Voltage	V <sub>dis</sub>	V <sub>cc</sub> -1.3		V <sub>cc</sub>	V	
Transmit Enable Voltage	V <sub>en</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	2
<b>Receiver</b>						
Single-ended Input Voltage Tolerance	V <sub>cc</sub>	-0.3		4.0	V	
Differential Output Voltage Swing	V <sub>out,pp</sub>	300		900	mV <sub>pp</sub>	
Differential Output Impedance	Z <sub>out</sub>	90	100	110	Ohm	3
Data output rise/fall time	T <sub>r</sub> /T <sub>f</sub>	9.5			ps	4
LOS Assert Voltage	V <sub>losH</sub>	V <sub>cc</sub> -1.3		V <sub>cc</sub>	V	5
LOS De-assert Voltage	V <sub>losL</sub>	V <sub>ee</sub>		V <sub>ee</sub> +0.8	V	5

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.

## Optical Characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
<b>Transmitter</b>						
Center Wavelength	$\lambda_c$	1260	1270	1280	nm	FL6843x
		1320	1330	1340	nm	FL8643x
Optical Spectral Width	$\Delta\lambda$			1	nm	
Average Optical Power	$P_{AVG}$	-3		6	dBm	1
Side Mode Suppression Ratio	SMSR	20			dB	
Optical Extinction Ratio	ER	3.5			dB	
Transmitter OFF Output Power	$P_{off}$			-30	dBm	
Transmitter and Dispersion Penalty	TDP			2.7	dB	
Optical Return Loss Tolerance	ORLT			20	dB	
Transmitter Eye Mask	Compliant with IEEE802.3ae					
<b>Receiver</b>						
Center Wavelength	$\lambda_c$	1320	1330	1340	nm	FL8643x
		1260	1270	1280	nm	FL6843x
Receiver Sensitivity (OMA)	Sen.			-14	dBm	2
Stressed Receiver Sensitivity (OMA)				-11.5	dBm	2
Average Receive Power		-18		-4	dBm	
Input Saturation Power (overload)	$P_{sat}$	-8			dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-assert	LOSD			-21	dBm	
Damage Threshold	$TH_d$	-3			dBm	
LOS Hysteresis	LOSH	0.5			dB	

Notes:


1. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
2. Measured with Light source 1310nm, ER=3.5dB; BER =  $<10^{-12}$  @ PRBS=2<sup>31</sup>-1 NRZ.

## Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

Parameter	Symbol	Min.	Max	Unit	Notes
Temperature monitor absolute error	DMI_Temp	-3	3	degC	Over operating temp
Supply voltage monitor absolute error	DMI_VCC	-0.1 5	0.15	V	Full operating range
RX power monitor absolute error	DMI_RX	-3	3	dB	
Bias current monitor	DMI_bias	-10 %	10%	mA	
TX power monitor absolute error	DMI_TX	-3	3	dB	

## Mechanical Dimensions

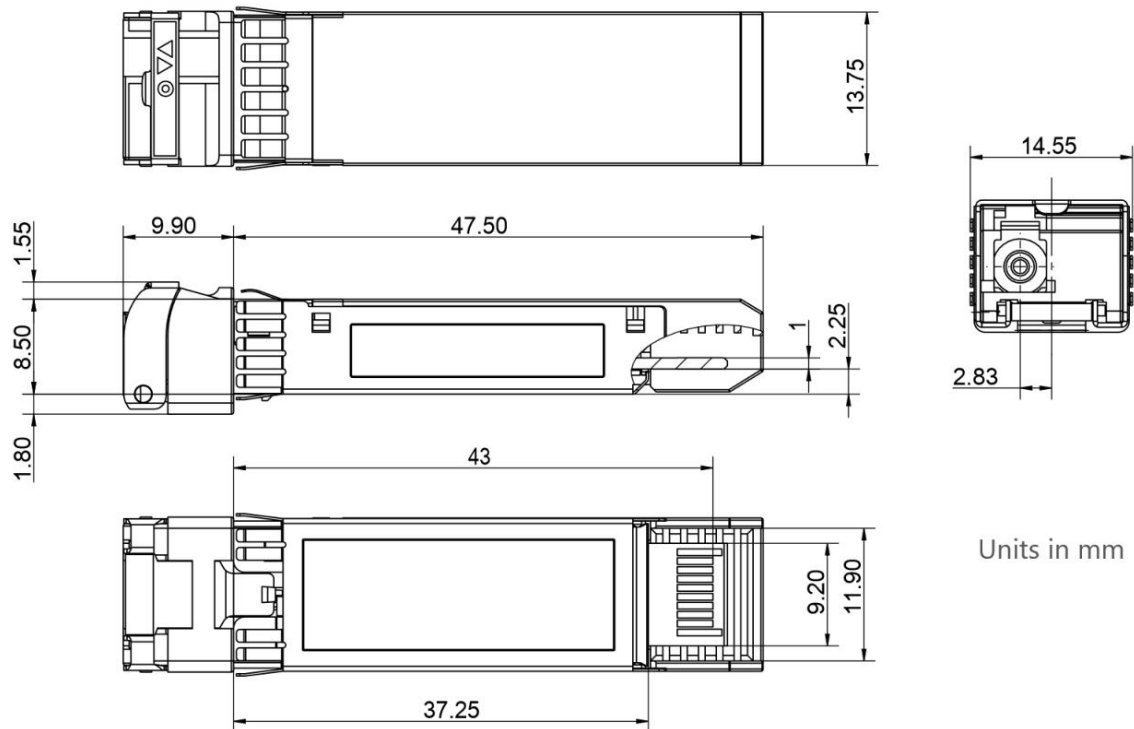

Units in mm

Figure2. Mechanical Outline

## Compatibility Test

In order to ensure the product compatibility, our products will be tested on the switch before shipment. Our modules can compatible with many mainstream brand switches, such as Cisco, Juniper, Extreme, Brocade, IBM, H3C, HP, Huawei, D-Link, Mikrotik, ZTE, TP-Link...

Our test equipment: VOLKTEK MEN-4110, HP 2530-8G, CRS226-24G-25+RM, Catalyst 2960G Series, Catalyst 3850 XS 10G SFP+, Catalyst 3750-E Series, HUAWEI S5700Series, H3C S3100V2 Series, Juniper-EX4200, etc.



**Cisco Catalyst 3850**



**HUAWEI S5700**



**H3C S3100V2**



**HP J9264AR**



**Juniper EX 4200**



**Alcatel 6850E-U24X**



**Mikrotik CR5226-24G-25+RM**



**Cisco Catalyst 2960G**



**Volktek MEN-4110**



## Product Production Process

# Quality Assurance

Continuous introduction of new equipment, produced by strict standards, strict quality inspection, to guarantee the high quality standard of each product.



**Standardized  
Production Line**




**Professional  
Welding**



**Assembling**



**Aging Testing**

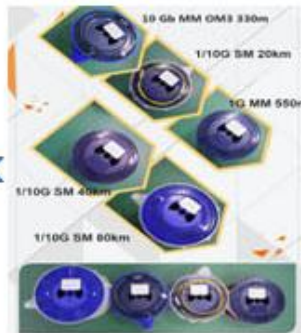

**Distance Testing**



**Cleaning end face**



**Product Initial Test**



**Switch Testing**



**Product Final Test**

## Packaging

ETU-Link provides two kinds of packaging, 10pcs/Tray and individual package.



Company: ETU-Link Technology Co., LTD

Address: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street,  
Longhua District, Shenzhen city, GuangDongProvince,China

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at [www.etulinktechnology.com](http://www.etulinktechnology.com).

Please e-mail us at [sales@etulinktechnology.com](mailto:sales@etulinktechnology.com) or call us for assistance.