


## EB45(54)03-C0D(I)-S

155Mbps SFP Bi-Directional 80km SFP Transceiver

### PRODUCT FEATURES

- Up to 155Mbps data-rate
- 1490nm DFB laser and 1550nm PIN photodetector for 120KM transmission
- 1550nm DFB laser and 1490nm PIN photodetector for 120KM transmission
- Compliant with SFP MSA and SFF-8472 with simplex SC receptacle
- Digital Diagnostic Monitoring:
- Internal Calibration or External Calibration
- Compatible with RoHS
- +3.3V single power supply
- Operating case temperature range:
  - 0 °C to +70 °C (Commercial)
  - 40 °C to +85 °C (Industrial)

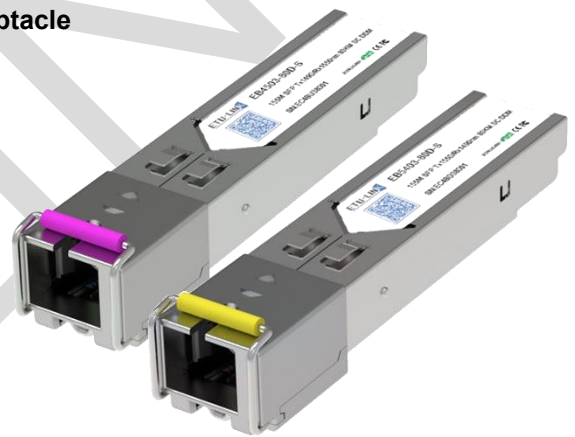

### APPLICATIONS

- SDH STM-1, S-1.1, L-1.1, L-1.2
- SONET OC-3 IR1, LR1, LR2
- Other optical links


## DESCRIPTIONS

The SFP-BIDI transceivers are high performance, cost effective modules supporting data-rate of 155Mbps and 120KM transmission distance with SMF.

The transceiver consists of three sections: a DFB laser transmitter, a PIN photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements.

The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

## Module Block Diagram

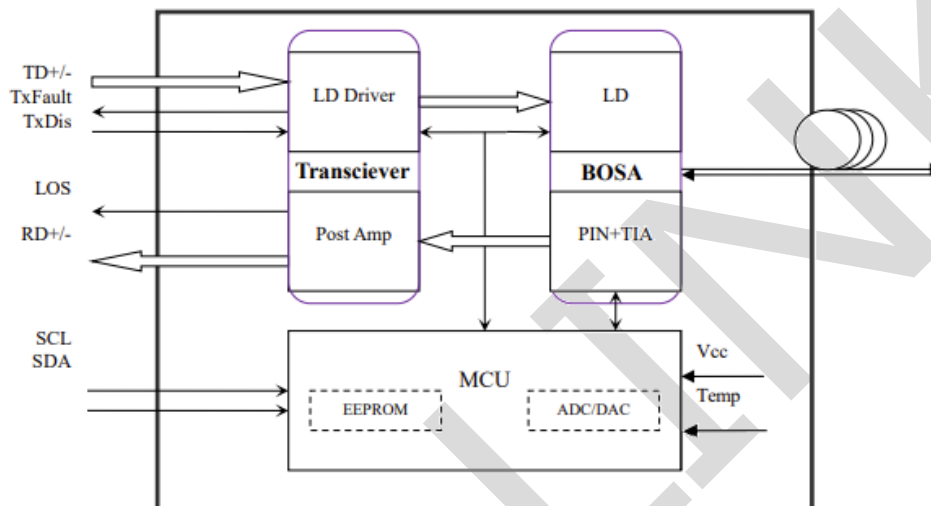

## Ordering Information

| Part No.      | Data Rate(optical ) | Laser | Fiber Type | Distance | Optical Interface | Temp    | DDMI | Latch Color |
|---------------|---------------------|-------|------------|----------|-------------------|---------|------|-------------|
| EB4503-C0D-S  | 155Mbps             | DFB   | SMF        | 120KM    | SC                | 0~70℃   | Y    | Purple      |
| EB5403-C0D-S  | 155Mbps             | DFB   | SMF        | 120KM    | SC                | 0~70℃   | Y    | Yellow      |
| EB4503-C0DI-S | 155Mbps             | DFB   | SMF        | 120KM    | SC                | -40~85℃ | Y    | Purple      |
| EB5403-C0DI-S | 155Mbps             | DFB   | SMF        | 120KM    | SC                | -40~85℃ | Y    | Yellow      |

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Typ | Max. | Unit | Ref. |
|----------------------------|--------|------|-----|------|------|------|
| Maximum Supply Voltage     | Vcc    | -0.5 |     | 4.7  | V    |      |
| Storage Temperature        | TS     | -40  |     | 85   | ℃    |      |
| Case Operating Temperature | TOP    | 0    |     | 70   | ℃    |      |

## Recommended Operating Conditions

| Parameter                  | Symbol          | Min   | Typical | Max             | Unit | Notes      |
|----------------------------|-----------------|-------|---------|-----------------|------|------------|
| Operating Case Temperature | T <sub>OP</sub> | 0     |         | 70              | °C   | Commercial |
|                            |                 | -40   |         | 85              |      | Industrial |
| Power Supply Voltage       | V <sub>CC</sub> | 3.135 | 3.3     | 3.465           | V    |            |
| Power Supply Current       | I <sub>CC</sub> |       | 200     | 280             | mA   |            |
| Data Rate                  |                 |       | 155     |                 | Mb/s |            |
| Control Input Voltage High |                 | 2     |         | V <sub>CC</sub> | V    |            |
| Control Input Voltage Low  |                 | 0     |         | 0.8             | V    |            |
| Link Distance (SMF)        | D               |       |         | 120             | km   | 9/125um    |

## Electrical Characteristics

| Parameter                      | Symbol                 | Min.                 | Typ | Max.                  | Unit | Ref. |
|--------------------------------|------------------------|----------------------|-----|-----------------------|------|------|
| Supply Voltage                 | V <sub>CC</sub>        | 3.15                 | 3.3 | 3.6                   | V    |      |
| Supply Current                 | I <sub>CC</sub>        |                      | 185 | 280                   | mA   |      |
| <b>Transmitter</b>             |                        |                      |     |                       |      |      |
| Input differential impedance   | R <sub>in</sub>        |                      | 100 |                       | Ω    | 1    |
| Single ended data input swing  | V <sub>in,pp</sub>     | 250                  |     | 1200                  | mV   |      |
| Transmit Disable Voltage       | V <sub>D</sub>         | V <sub>CC</sub> -1.3 |     | V <sub>CC</sub>       | V    |      |
| Transmit Enable Voltage        | V <sub>EN</sub>        | V <sub>EE</sub>      |     | V <sub>EE</sub> + 0.8 | V    | 2    |
| Transmit Disable Assert Time   |                        |                      |     | 10                    | us   |      |
| <b>Receiver</b>                |                        |                      |     |                       |      |      |
| Single ended data output swing | V <sub>out,pp</sub>    | 250                  |     | 800                   | mV   | 3    |
| Data output rise time          | t <sub>r</sub>         |                      | 100 | 175                   | ps   | 4    |
| Data output fall time          | t <sub>f</sub>         |                      | 100 | 175                   | ps   | 4    |
| LOS Fault                      | V <sub>LOS fault</sub> | V <sub>CC</sub> -0.5 |     | V <sub>CC</sub> HOST  | V    | 5    |
| LOS Normal                     | V <sub>LOS norm</sub>  | V <sub>EE</sub>      |     | V <sub>EE</sub> +0.5  | V    | 5    |
| Power Supply Rejection         | PSR                    | 100                  |     |                       | mVpp | 6    |

### Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.

2. Or open circuit.
3. Into 100 ohms differential termination.
4. 20 – 80 %
5. Loss of Signal is LVTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

## Optical and Characteristics

| Parameter                   | Symbol                                           | Min. | Typ  | Max. | Unit | Note            |
|-----------------------------|--------------------------------------------------|------|------|------|------|-----------------|
| Transmitter                 |                                                  |      |      |      |      |                 |
| Operating Wavelength        | $\lambda$ C                                      | 1470 | 1490 | 1510 | nm   | EB4503-C0D(I)-S |
|                             |                                                  | 1530 | 1550 | 1570 | nm   | EB5403-C0D(I)-S |
| Ave. output power (Enabled) | Po                                               | 0    |      | 5    | dBm  | 1               |
| Extinction Ratio            | ER                                               | 10   |      |      | dB   | 1               |
| RMS spectral width          | $\Delta\lambda$                                  |      |      | 4    | nm   |                 |
| Rise/Fall time (20%~80%)    | Tr/Tf                                            |      |      | 0.26 | ps   | 2               |
| Output Eye Mask             | Telcordia GR-253-CORE and ITU-T G.957 compatible |      |      |      |      |                 |
| Receiver                    |                                                  |      |      |      |      |                 |
| R Operating Wavelength      |                                                  | 1530 |      | 1570 | nm   | EB4503-C0D(I)-S |
|                             |                                                  | 1470 |      | 1510 | nm   | EB5403-C0D(I)-S |
| Sensitivity                 | Psen                                             |      |      | -32  | dBm  | 3               |
| Min. overload               | Pimax                                            | -9   |      |      | dBm  |                 |
| LOS Assert                  | Pa                                               | -45  |      |      | dBm  |                 |
| LOS De-assert               | Pd                                               |      |      | -34  | dBm  | 4               |
| LOS Hysteresis              | Pd-Pa                                            | 0.5  |      | 6    | dB   |                 |

### Notes:


1. Measure at 2<sup>23</sup>-1 NRZ PRBS pattern
2. Transmitter eye mask definition
3. Measured with Light source 1490nm (1550nm), ER=10dB; BER =<10<sup>-12</sup> @PRBS=2<sup>23</sup>-1 NRZ.
4. When LOS de-asserted, the RX data+/- output is signal output.

## Digital Diagnostics

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

| Parameter                             | Symbol   | Min.  | Max  | Unit | Notes                |
|---------------------------------------|----------|-------|------|------|----------------------|
| Temperature monitor absolute error    | DMI_Temp | -3    | 3    | °C   | Over operating temp  |
| Supply voltage monitor absolute error | DMI_VCC  | -0.15 | 0.15 | V    | Full operating range |
| RX power monitor absolute error       | DMI_RX   | -3    | 3    | dB   |                      |
| Bias current monitor                  | DMI_bias | -10%  | 10%  | mA   |                      |
| TX power monitor absolute error       | DMI_TX   | -3    | 3    | dB   |                      |

## Pin Diagram

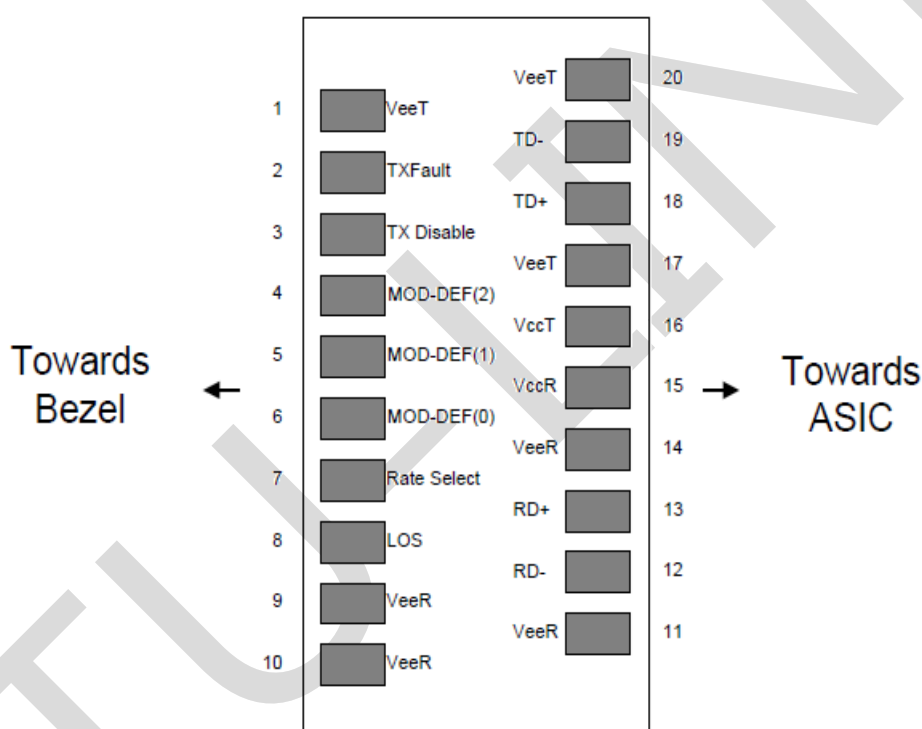

## Pin Definitions


| Pin | Name       | Function                                               | Notes |
|-----|------------|--------------------------------------------------------|-------|
| 1   | VeeT       | Tx ground                                              |       |
| 2   | Tx Fault   | Tx fault indication, Open Collector Output, active "H" | 1     |
| 3   | Tx Disable | LVTTTL Input, internal pull-up, Tx disabled on "H"     | 2     |
| 4   | MOD-DEF2   | 2 wire serial interface data input/output (SDA)        | 3     |
| 5   | MOD-DEF1   | 2 wire serial interface clock input (SCL)              | 3     |
| 6   | MOD-DEF0   | Model present indication                               | 3     |

| Pin | Name        | Function                                             | Notes |
|-----|-------------|------------------------------------------------------|-------|
| 7   | Rate select | No connection                                        |       |
| 8   | LOS         | Rx loss of signal, Open Collector Output, active "H" | 4     |
| 9   | VeeR        | Rx ground                                            |       |
| 10  | VeeR        | Rx ground                                            |       |
| 11  | VeeR        | Rx ground                                            |       |
| 12  | RD-         | Inverse received data out                            | 5     |
| 13  | RD+         | Received data out                                    | 5     |
| 14  | VeeR        | Rx ground                                            |       |
| 15  | VccR        | Rx power supply                                      |       |
| 16  | VccT        | Tx power supply                                      |       |
| 17  | VeeT        | Tx ground                                            |       |
| 18  | TD+         | Transmit data in                                     | 6     |
| 19  | TD-         | Inverse transmit data in                             | 6     |
| 20  | VeeT        | Tx ground                                            |       |


**Notes:**

- When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 – 10K $\Omega$  resistor on the host board.
- TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7 – 10K $\Omega$  resistor. It's states are:  
Low (0 – 0.8V): Transmitter on (>0.8, < 2.0V): Undefined  
High (2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled
- Mod-Def 0, 1, 2. These are the module definition pins. They should be pulled up with a 4.7K – 10K $\Omega$  resistor on the host board. The pull-up voltage shall be VccT or VccR.  
Mod-Def 0 has been grounded by the module to indicate that the module is present  
Mod-Def 1 is the clock line of two wire serial interface for serial ID  
Mod-Def 2 is the data line of two wire serial interface for serial ID
- When high, this output indicates loss of signal (LOS). Low indicates normal operation.
- RD+/-: These are the differential receiver outputs. They are AC coupled 100 $\Omega$  differential lines which should be terminated with 100 $\Omega$  (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.
- TD+/-: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100 $\Omega$  differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

## Recommended Interface Circuit

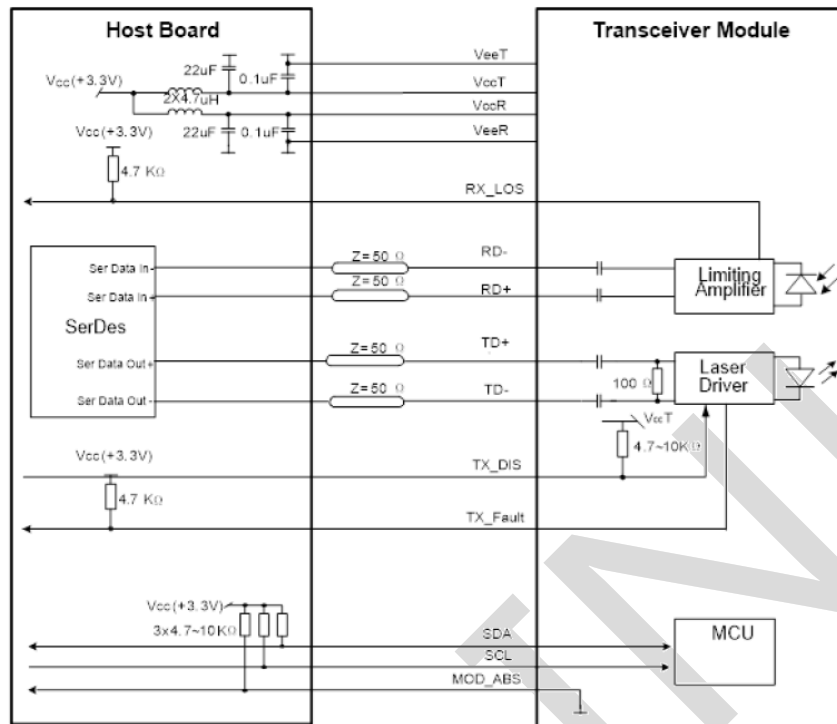

## Mechanical Diagram

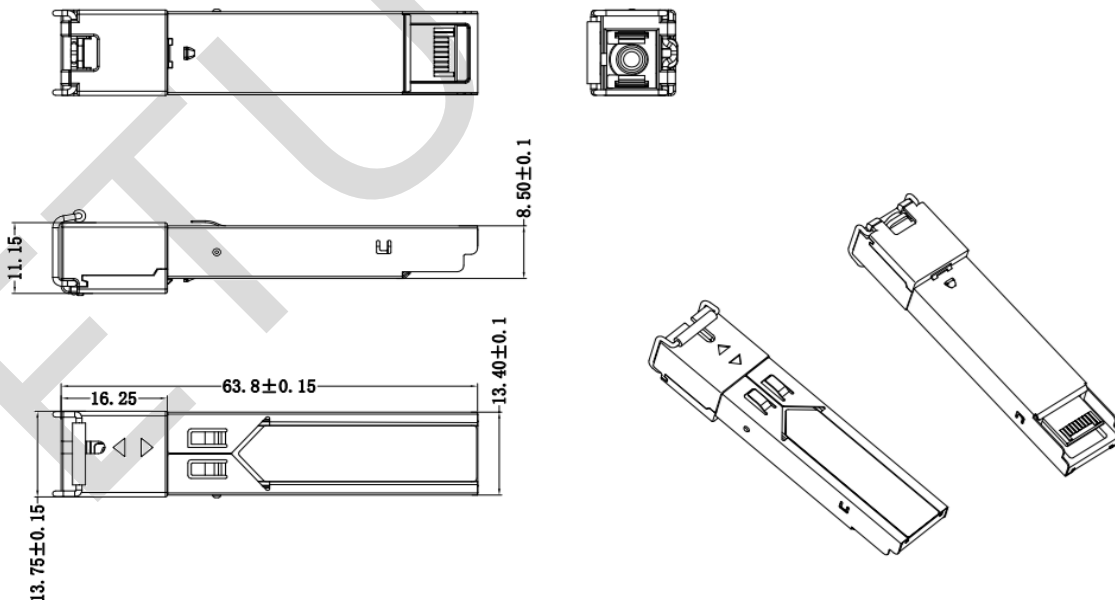

## Revision History

| Version No. | Date             | Description           |
|-------------|------------------|-----------------------|
| 1.0         | Sep 15, 2014     | Preliminary datasheet |
| 2.0         | October 22, 2017 | Product upgrades      |
| 3.0         | Sep 15, 2024     | Format change         |

Company: ETU-Link Technology Co., LTD

Production base: Right side of 3rd floor, No. 102 building, Longguan expressway, Dalang street, Longhua District, Shenzhen city, Guangdong Province, China 518109

R&D base: Floor 4, Building 4, Nanshan Yungu Phase LI, Taoyuan Community, Xili Street, Nanshan District, Shenzhen

Tel: +86-755 2328 4603

Addresses and phone number also have been listed at [www.etulinktechnology.com](http://www.etulinktechnology.com).

Please e-mail us at [sales@etulinktechnology.com](mailto:sales@etulinktechnology.com) or call us for assistance.